


SERIES - MI-V-SF

STRAIGHT BASE FIXED HOLD DOWN ARM

Supplied with Spindle assemblies . Clamp runs with specially designed pre-lubricated bushes for long life cycle.
Silicon rubber grip having large grip surface with oil & heat resistance.

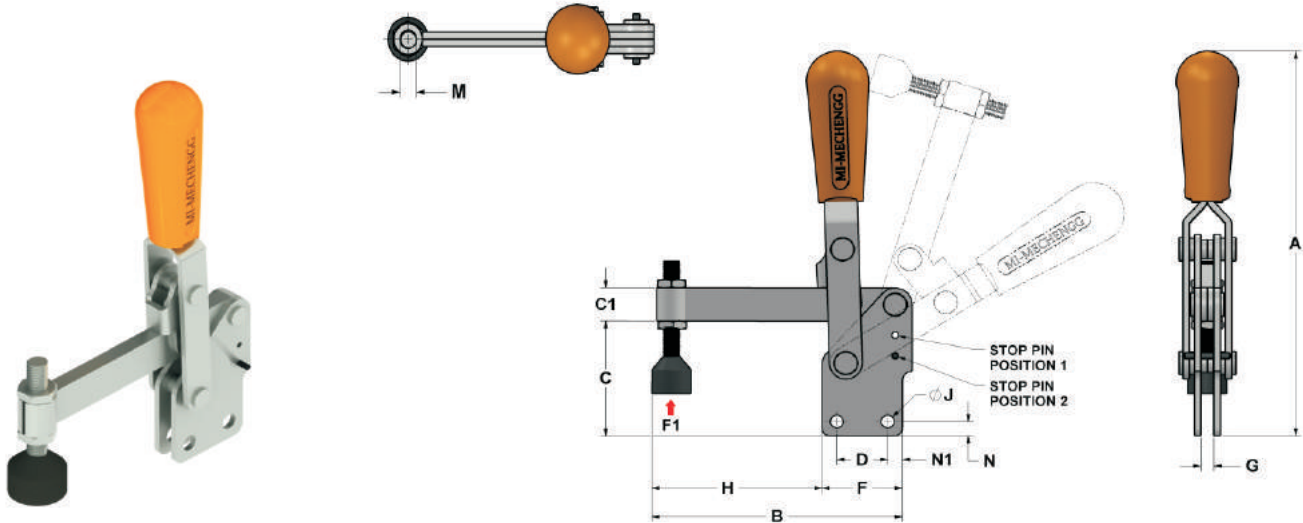

- **Material** : Steel
- **Surface Finish** : Electro Zinc - Plated
- **Hand Grip** : Silicon Rubber
- **Clamping Bolt** : 8.8 Grade Moulded with NBR

PART NO	ARM OPENS AT PIN 1	HANDLE MOVES AT PIN 1	ARM OPENS AT PIN 2	HANDLE MOVES AT PIN 2	HOLDING CAPACITY F1 (N) ↑	APPROX △ (Kg's)	SPINDLE SUPPLIED (METRIC) PART NO
MI-V-50-SF	90°	60°	–	–	0230	0.85	NTS-V50
MI-V-100-SF	82°	57°	–	–	0420	0.170	NTS-V100
MI-V-150-SF	55°	50°	120°	72°	0750	0.400	NTS-V150
MI-V-250-SF	85°	55°	135°	72°	1250	0.660	NTS-V250
MI-V-350-SF	50°	40°	108°	60°	1780	0.950	NTS-V350
MI-V-450-SF	60°	52°	125°	77°	2250	1.240	NTS-V450

Note : For Spindle dimensions refer accessories page

PART NO	A	B	C	C1	D	F	G	H	J	M	N	N1
MI-V-50-SF	97	58	28	9	15	25	4	33	4.5	M5	5	5
MI-V-100-SF	131	74	36	10	14	26	6	48	5	M6	6	6
MI-V-150-SF	176	108	54	16	19	36	6	72	7	M8	6.5	8.5
MI-V-250-SF	228	143	63	20	26	44	8	99	8.5	M10	10	9
MI-V-350-SF	243	153	73	21	31	49	8	104	8	M10	9	9
MI-V-450-SF	260	179	72	25	32	56	10	123	9	M12	10	12